

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 382 382 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
21.01.2004 Bulletin 2004/04

(51) Int Cl.7: **B01J 8/02, C01B 3/38**

(21) Application number: **03254552.7**

(22) Date of filing: **21.07.2003**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**
Designated Extension States:
AL LT LV MK

(30) Priority: **19.07.2002 US 397227 P**

(71) Applicant: **Conoco Phillips Company**
Houston, TX 77079 (US)

(72) Inventors:
• **Lewis, Guy**
Ponca City Oklahoma 74604 (US)
• **Pan, Chien-Ping**
Ponca City Oklahoma 74604 (US)
• **Cemal, Ercan**
Tulsa Oklahoma 74133 (US)

- **Wright, Harold A.**
Ponca City Oklahoma 74601 (US)
- **Minahan, David M.**
Stillwater Oklahoma 74075 (US)
- **Landis, Steve**
Katy Texas 77494 (US)
- **Anderson, David**
Ponca City Oklahoma 74604 (US)
- **Melquist, Vincent**
Ponca City Oklahoma 74604 (US)
- **Straguzzi, Gloria**
Ponca City Oklahoma 74604 (US)

(74) Representative: **Jeffrey, Phillip Michael**
Frank B. Dehn & Co.
179 Queen Victoria Street
London EC4V 4EL (GB)

(54) **Gas distributor comprising a plurality of channels and its use in a catalytic reactor**

(57) A method of partially oxidizing a feed gas comprises providing a reactor containing a catalyst, providing a gas distributor comprising a body having a plurality of channels therethrough and a plurality of outlets from said channels for distributing gas across the catalyst, feeding the feed gas and the oxygen-containing gas into the gas distributor and allowing the feed gas and the oxygen-containing gas to flow through the gas distribu-

tor and out through the outlets into contact with the catalyst. The gas distributor preferably comprises a micro-channel gas distributor, which can be assembled by providing a plurality of etched plates defining flow channels, and stacking and fusing the plates. The reactant gases can be mixed within the gas distributor or maintained separately until they have exited the gas distributor.

EP 1 382 382 A1


Description

[0001] The present invention generally relates to a device for safely mixing unreacted feed gases prior to feeding them into a reactor. More specifically, the present invention relates to the use of a micro-channel gas distributor to mix, contain, and/or distribute reactive feed gases onto a catalytic surface.

[0002] The quantities of methane, the main component of natural gas, are available in many areas of the world, and natural gas is predicted to outlast oil reserves by a significant margin. However, most natural gas is situated in areas that are geographically remote from population and industrial centers. The costs of compression, transportation, and storage make its use economically unattractive.

[0003] To improve the economics of natural gas use, much research has focused on methane as a starting material for the production of higher hydrocarbons and hydrocarbon liquids. The conversion of methane to hydrocarbons is typically carried out in two steps. In the first step, methane is reformed with water to produce carbon monoxide and hydrogen (i.e., synthesis gas or syngas). In a second step, the syngas intermediate is converted to higher hydrocarbon products by processes such as the Fischer-Tropsch Synthesis. For example, fuels with boiling points in the middle distillate range, such as kerosene and diesel fuel, and hydrocarbon waxes may be produced from the synthesis gas.

[0004] Current industrial use of methane as a chemical feedstock proceeds by the initial conversion of methane to carbon monoxide and hydrogen by either steam reforming, which is the most widespread process, or by dry reforming or by autothermal reforming. Steam reforming currently is the major process used commercially for the conversion of methane to synthesis gas, proceeding according to Equation 1.



[0005] Although steam reforming has been practiced for over five decades, efforts to improve the energy efficiency and reduce the capital investment required for this technology continue. For many industrial applications, the 3:1 ratio of H_2 :CO products is problematic, and the typically large steam reforming plants are not practical to set up at remote sites of natural gas formations.

[0006] Methane residence times in steam reforming are on the order of 0.5 - 1 second, whereas for heterogeneously catalyzed partial oxidation, the residence time is on the order of a few milliseconds. For the same production capacity, syngas facilities for the partial oxidation of methane can be far smaller, and less expensive, than facilities based on steam reforming. A recent report (M. Fichtner et al. *Ind. Eng. Chem. Res.* (2001) 40:3475-3483) states that for efficient syngas produc-

tion, the use of elevated operation pressures of about 2.5 MPa is required. Those authors describe a partial oxidation process in which the exothermic complete oxidation of methane is coupled with the subsequent endothermic reforming reactions (water and CO_2 decomposition). This type of process can also be referred to as autothermal reforming or ATR, especially when steam is co-fed with the methane. Certain microstructured rhodium honeycomb catalysts are employed which have the advantage of a smaller pressure drop than beds or porous solids (foams) and which resist the reaction heat of the total oxidation reaction taking place at the catalyst inlet. The honeycomb is made by welding together a stack of rhodium foils that have been microstructured by means of wire erosion or cutting.

[0007] The catalytic partial oxidation ("CPOX") or direct partial oxidation of hydrocarbons (e.g., natural gas or methane) to syngas has also been described in the literature. In catalytic partial oxidation, natural gas is mixed with air, oxygen-enriched air, or oxygen, and introduced to a catalyst at elevated temperature and pressure. The partial oxidation of methane yields a syngas mixture with a H_2 :CO ratio of 2:1, as shown in Equation 2.



[0008] This ratio is more useful than the H_2 :CO ratio from steam reforming for the downstream conversion of the syngas to chemicals such as methanol or to fuels. Furthermore, oxidation reactions are typically much faster than reforming reactions. This allows the use of much smaller reactors for catalytic partial oxidation processes than is possible in a conventional steam reforming process.

[0009] While its use is currently limited as an industrial process, the exothermic direct partial oxidation or CPOX of methane has recently attracted much attention due to its inherent advantages, such as the fact that due to the significant heat that is released during the process, there is no requirement for the continuous input of heat in order to maintain the reaction, in contrast to steam reforming processes.

[0010] The current interest in partial oxidation processes has resulted in various improvements in the technologies associated with that process, including catalyst composition, catalyst structure, reactor structure, and operating parameters. One aspect that has not received as much attention is the technology associated with the injection of feed gases into the partial oxidation reactor. In particular, it is necessary to feed methane and an oxygen-containing gas into the reactor under conditions of elevated temperature and pressure. The same feed conditions that are conducive to efficient operation of the partial oxidation process, however, are conducive to reactions that are less desirable, and possibly even haz-

ardous, such as the ignition and combustion of the feedstock. At the same time, it is desirable to mix the feed gases as completely as possible, to as to maximize the efficiency of the catalytic reaction. It is particularly desirable to avoid pre-reaction and pre-ignition of the gases.

[0011] As described in U.S. Patent No. 6,267,912, which is incorporated herein by reference, catalytic partial oxidation processes attempt to eliminate gas phase oxidation reactions entirely, so that all of the partial oxidation reactions take place on the catalyst surface. The reactants are contacted with the catalyst at a very high space velocity, so that gas phase reactions are minimized. Gas phase reactions are undesirable because they can increase the occurrence of undesired combustion reactions (producing steam and carbon dioxide), damage the catalyst, and accelerate its deactivation.

[0012] Hence, there is a need for a method and apparatus for mixing partial oxidation feed gases that achieves thorough mixing, and if necessary preheat, and provides an even distribution of the mixed gases across the catalyst surface, while minimizing or preventing undesired gas phase reactions.

[0013] The present invention provides a method and apparatus for mixing partial oxidation feed gases. The present invention can be used for mixing partial oxidation feed gases or other gases, such as reactants for use in a catalyzed reaction. The present invention provides an apparatus that achieves thorough mixing of the feed gases and can be used to preheat or precool the feed gases if necessary, while minimizing or preventing undesired gas phase reactions. In particular, the present invention entails using a micro-channel gas distributor in a preferred manner to accomplish thorough mixing of methane and an oxygen-containing gas.

[0014] In one embodiment, the micro-channel gas distributor is positioned slightly upstream of the catalyst and is used only to distribute each feed gas evenly across the catalyst surface, with mixing occurring after the gases leave the gas distributor. In another embodiment, the micro-channel gas distributor is positioned immediately upstream of the catalyst and is used both to mix the feed gases and to distribute them across the catalyst surface.

[0015] In either embodiment, the micro-channel gas distributor can include an additional flow path that is separate from the flow paths of the feed gases and contains a heating or cooling fluid, so that the temperature of the feed gases is adjusted as they pass through the micro-channel gas distributor. The present invention preserves feed integrity, minimizes premature gas-phase reactions and reduces the occurrence of reactant pre-ignition.

[0016] Similarly, the reactor system in which the present gas distributor is used can be operated with or without recycle. If present, the recycle line can be an additional feed into the gas distributor and mixed with the reactor streams inside the gas distributor, or it can

be added to one of the feed streams upstream of the gas distributor.

[0017] As used herein, the term "micro-channel gas distributor" refers to devices such as those discussed in detail below, each comprising an essentially monolithic body having a plurality of microchannels in a prescribed pattern therethrough.

[0018] Downstream of the present micro-channel gas distributor, the gases mixed in the micro-channel gas distributor or distributed by the micro-channel gas distributor and mixed upon exiting the gas distributor can be reacted on any suitable partial oxidation catalyst and under any suitable partial oxidation conditions, such as are known in the art.

[0019] Under autothermal process conditions there is no external heat source required to the partial oxidation reaction. The net partial oxidation reaction conditions are promoted by optimizing the concentrations of hydrocarbon and O_2 in the reactant gas mixture, preferably with a mole ratio in the range of from about 1.5:1 to about 3.3:1 carbon: O_2 . In some embodiments, steam may also be added to produce extra hydrogen and to control (i.e., reduce) the outlet temperature. The steam can be added as an additional flow stream in the gas distributor, can be premixed with one of the feed gases upstream of the gas distributor, or can be added separately, as desired. Regardless, it is preferred that the ratio of steam to carbon (by weight) range from 0 to 3.

[0020] Pressure, residence time, amount of feed preheat and amount of nitrogen dilution, if used, also affect the reaction products. The process also preferably includes maintaining a catalyst residence time of no more than about 100 milliseconds for the reactant gas mixture and in some reactor schemes even less. This is accomplished by passing the reactant gas mixture over, or through the porous structure of the catalyst system at a gas hourly space velocity of about 20,000 - 100,000,000 h^{-1} , preferably about 100,000 - 25,000,000 h^{-1} . In preferred embodiments of the process, the catalyst system catalyzes the net partial oxidation of at least 80% of a methane feedstock to CO and H_2 with a selectivity for CO and H_2 products of at least about 80% CO and 80% H_2 .

[0021] In certain embodiments of the process, the step of maintaining net partial oxidation reaction promoting conditions includes keeping the temperature of the reactant gas mixture at about 30°C - 750°C and keeping the temperature of the catalyst at about 600-2,000°C, preferably between about 600-1,600°C, by self-sustaining reaction. In some embodiments, the process includes maintaining the reactant gas mixture at a pressure of about 100-4,000 kPa (about 1 - 40 atmospheres), preferably about 200 - 3,000 kPa (about 2 - 30 atmospheres), and still more preferably between about 800-2900 kPa (about 8 and 29 atmospheres), while contacting the catalyst.

[0022] In some embodiments, the process comprises mixing a methane-containing feedstock and an O_2 -con-

taining feedstock together in a carbon:O₂ molar ratio of about 1.5:1 to about 3.3:1, preferably about 1.7:1 to about 2.1:1, and more preferably about 2:1. Preferably the methane-containing feedstock is at least 80% methane, more preferably at least 90%. These and other embodiments, features and advantages of the present invention will become apparent with reference to the following description and drawings.

[0023] Various preferred embodiments of the present invention will now be described by way of example only and with reference to the accompanying drawings, in which:

Figure 1 is a schematic diagram of a micro-channel gas distributor in accordance with a preferred embodiment of the present invention;

Figure 2 is a front view of a single plate such as can be used to form a micro-channel distributor in accordance with a preferred embodiment of the present invention;

Figure 3 is a schematic diagram of a micro-channel gas distributor in accordance with an alternative embodiment of the present invention;

Figure 4 is a cross-sectional view of the interior of a short contact time reactor employed for synthesis gas production according to an embodiment of the present invention; and

Figure 5 is a schematic cross-section of a micro-channel gas distributor combined with a manifold, including a schematic illustration of the flow patterns of two reactant gases through the micro-channel gas.

[0024] Referring initially to Figure 1, a micro-channel gas distributor 10 is shown schematically. Distributor 10 preferably has an upstream face 12, and a downstream face 14. Distributor 10 is preferably constructed by forming a plurality of flow channels into each of a plurality of plates (not shown in Figure 1) and stacking the plates as described below.

[0025] Referring briefly to Figure 2, an exemplary plate 20 includes an up stream edge 22, a downstream edge 24, a front surface 26 and a back surface (not shown). Front surface 26 preferably includes a plurality of channels 26 formed therein. Each channel includes an inlet end 25 and an outlet end 27. The channels can be formed by etching or machining or can be pre-formed in each plate 20. The plates are preferably made of a metal or other material that can withstand the operating conditions in which the present invention is applied. Once the desired plurality of channels (flow paths) has been formed in each plate, the plates are stacked. Pressure and heat are applied to the stack, causing the plates to bond together so as to form a single monolithic block. The flow channels remain clear throughout the bonding process, and the result is a block having a plurality of passages therethrough.

[0026] This manner of assembly provides a high de-

gree of flexibility in the configuration of the fluid flow paths through the resulting block. Because the channels can be formed as desired and because each plate can be machined, etched and/or pierced before the plates are stacked, fluid flow paths between plates, as well as fluid flow paths in the plane of each plate, can be achieved. Likewise, the configuration of the channels, plates, and the gas distributor itself can be set as desired. For example, the gas distributor may be hexahedral, and may have a cross-sectional flow area that is preferably rectangular and more preferably square. It will be understood that the outer configuration of the present distributor has little direct effect on the operation of the system. Hence, the distributor itself may have a rectangular, square, or round cross-section, for example, and can more than one cross-section along its length. Similarly, the number of fluids that can be passed through a single gas distributor block, either separately or in contact with one another, depends only on the number of inlets and flow passages provided and the configurations of the fluid flow paths through the block.

[0027] Referring again to Figure 1, while channels 26 are not shown in Figure 1, inlet ends 25 and outlet channel ends 27 corresponding to a plurality of stacked plates 20 are shown. The general direction flow through the distributor 10 is represented by arrow 15. It will be understood that the flow in any given portion of a particular channel may not be in the direction of arrow 15, particularly if channels 26 are tortuous.

[0028] One objective of certain embodiments of the present invention is to provide a gas distributor that achieves mixing of two or more gases, as well as distribution of a gas or gas mixture across a desired area. According to one embodiment of the invention, this is achieved by including with the plurality of plates 20 a second plurality of plates (not shown) that have channels describing a second, predetermined flow pattern. In a preferred embodiment, the second flow pattern complements the flow pattern on plates 20 such that gases that enter distributor 10 as separate streams emerge from distributor either as blended streams or a plurality of interspersed streams that result in effective mixing of the two (or more gases). By way of example only, the plates 20 illustrated in Figure 2, in which a plurality of inlet openings in the left (as drawn) half of the plate are "mapped" to a plurality of outlet openings that span the width of plate 20 could be combined with a plurality of complementary plates in which a plurality of inlet openings in the right half of the plate were mapped to a plurality of outlet openings that also spanned the width of the plate.

[0029] When a distributor block is formed by alternating "left" and "right" plates, the result is a distributor in which the flow pattern for a single gas is outlined in phantom in Figure 1. It can be seen that, in this particular embodiment, for a single gas, the openings that form channel upstream ends 25 are twice as closely packed as the openings that form channel downstream ends 27.

The inlet openings for the complementary plates (not shown) would preferably be in the right (as drawn) half of upstream face 12 and the outlet openings would be interspersed with outlet openings 27 in downstream face 14. In this embodiment, one gas is fed into the left (as drawn) side of the distributor and distributed evenly across its downstream face 14, as illustrated in phantom in Figure 1, and the second gas is fed into the right (as drawn) side of the distributor and also distributed evenly across downstream face 14.

[0030] This concept is further illustrated in Figure 3, in which first and second feed gases are injected into the gas distributor block via separate lines 100, 102, respectively. The positioning of feed lines 100, 102 at the top of each schematic Figure is not intended to imply that the actual feed lines should be next to one another, or parallel, or have any particular configuration.

[0031] As shown in Figure 3, each inlet stream 100, 102 is split between a plurality of separate fluid passages or channels. Specifically, the fluid in feed stream 100 is split between passages 26 and the fluid in stream 102 is split between passages 36. The splitting of each inlet stream preferably occurs in a manifold section 128, 138, respectively. The pressure of each fluid in its respective passages is preferably uniform, but it is not necessary that the pressure of the two fluids be the same. In embodiment shown in Figure 3, the fluids are maintained in separate flow passages and do not mix during their transit through the gas distributor. They exit the downstream face 14 of gas distributor 10 via interspersed outlets 27, 37, respectively.

[0032] An optional zone of reducing cross-section is shown at 140 in Figure 3. In one embodiment, this zone is used as a mixing zone. In another embodiment, distributor 10 extends into this zone and includes a downstream segment having a cross-sectional area that is different from the cross-sectional area of the segment upstream of it. In preferred embodiments, a catalyst bed 150 is provided at some predetermined distance downstream of distributor 10. The distance determines the volume of an optional chamber 240 between the distributor and the catalyst.

[0033] Again, it will be understood that the direction of flow indicated in the Figures is not intended to be an indication that the gases actually flow downward, or in any other direction. Rather, one of ordinary skill will appreciate that reactor systems incorporating one or more gas distributors in accordance with the present invention can be oriented in any suitable manner.

[0034] Similarly, for ease of understanding, the Figures show only schematic fluid flow patterns and not the actual flow channels that can be used to produce such flow patterns. It will be understood that the micro-channel gas distributors discussed above can be configured to produce the flow patterns illustrated in the Figures, as well as various other flow patterns. More particularly, it will be understood that various flow channel configurations could be used to generate the two-dimensional

flow patterns shown schematically in Figures and 3. Likewise, the two-dimensional flow patterns shown schematically in the Figures can be extended into three dimensions, with a variety of flow channel configurations.

[0035] By way of example only, and without limiting the scope of the claims, it is contemplated that the fluid flow channels in the present gas distributor could be configured such that gas streams are divided, combined, turned, and/or straightened within the gas distributor. For example, depending on the positions of the inlet lines relative to the gas distributor, it may be desirable to change the direction of flow of one or more of the streams. If two or more gases are to be combined within the gas distributor, a change in direction can be accomplished before, after, or as the fluids in question are combined.

[0036] In an alternative embodiment, while feed streams 100, 102 enter distributor 10 separately and are each split in a respective manifold section 128, 138, as in Figure 2, individual fluid streams are combined within distributor 10 so as to form combined streams. The result is that each fluid stream leaving the gas distributor already comprises a mixture of feed gases when it exits the gas distributor. In this embodiment, the amount of space that is required between the gas distributor 10 and the catalyst 150 is minimal, since no additional mixing space is needed. In this embodiment, the gas distributor serves to provide an evenly distributed gas flow onto the catalyst. In still another embodiment, feed streams 100 and 102 are not kept separate in the manifold section and thus are allowed to begin mixing before they enter the fluid channels of the gas distributor. Similarly, if desired, additional mixing devices can be added up - or downstream of the gas distributor.

[0037] The number of fluid outlets is preferably high relative to the total surface area of the catalyst. For example, it may be preferred to provide at least 7 outlets, preferably evenly spaced across the cross-sectional area of the reactor or catalyst bed. In some embodiments, the number of outlets per square foot is preferably at least 1, and more preferably at least 25. Still other embodiments may have as many as 100, 1000, 2000, or 6000 outlets per ft² (1076, 10764, 21528 or 64584 outlets per m²), or more. If the reactant gases are kept separate as they pass through the gas distributor, the number, size and proximity of the outlets is preferably such that the fluids are quickly uniformly dispersed into each other upon exiting the gas distributor block. This can be achieved by having at least 20 outlets of each gas per square foot (215 outlets per m²).

[0038] It is preferred that the micro-channel gas distributor be 10 configured so as to minimize the pressure drop across it. In particular, it is preferred that the pressure drop across the gas distributor be minimized to the lowest level that can be achieved while still providing the desired degree of mixing and flow. In some embodiments, this corresponds to a pressure drop of less than

30 psi (207 kPa), preferably less than 10 psi (69 kPa), more preferably less than 5 psi (34.4 kPa), still more preferably less than 1 psi (6.9 kPa), and most preferably less than 0.5 psi (3.4 kPa). Still further, it is preferred that the ratio of the sum of the areas of the inlet openings to the sum of the areas of the outlet openings be between about 1:2 and 1:10, and more preferably between about 1:2 and 1:6. Likewise, in one embodiment it is preferred that the channels each have substantially the same length, so that the flow resistance in each channel is the same. It is further preferred that each channel have at least one change in direction and more preferably at least two turns between the inlet and the outlet, as illustrated in Figure 2.

[0039] In any embodiment of the present invention, a third fluid, or additional fluids, can be passed through the gas distributor block, with or without being combined with the reactant gases. In particular, a heating or cooling medium, such as steam, can be flowed through the gas distributor, in either counter-flow, co-flow, or cross-flow configurations, so as to preheat the feed gases or feed gas mix. The heating or cooling medium is preferably, but not necessarily, kept separate from the reactant gases, transferring heat to them via conduction through the gas distributor body. As mentioned above, in certain embodiments, the hydrocarbon or reactant gas mixture is preferably preheated to about 30°C - 750°C before contacting the catalyst.

[0040] In preferred embodiments, the closely-packed nature of the fluid passages and corresponding closely-packed nature of their respective outlets yields an outlet flow having a very highly desirable degree of uniformity and homogeneity. In turn, this reduces the risk of undesired reactions and reduces the occurrence of hot spots on the catalyst

Process of Producing Syngas

[0041] A preferred process for producing synthesis gas employs a monolithic or divided catalyst containing a catalyst composition that is effective for catalyzing the conversion of methane or natural gas and molecular oxygen to primarily CO and H₂ by a net catalytic partial oxidation (CPOX) reaction. Preferably employing a fast contact (i.e., millisecond range)/fast quench (i.e., less than one second) reactor assembly, a feed stream comprising a light hydrocarbon and an oxygen-containing gas is contacted with the catalyst. The reactor is preferably operated at a reactant gas pressure greater than 1 atmosphere (>100 kPa), more preferably above 2 atmospheres (203 kPa), which is advantageous for optimizing syngas production space-time yields. One suitable reaction regime is a fixed bed reaction regime, in which the catalyst is retained within a reaction zone in a fixed arrangement, as conceptually illustrated in Figure 4.

[0042] Referring now to Figure 4, a reactor system 210 that is suitable for producing synthesis gas by partial

oxidation of a light hydrocarbon, or for carrying out other oxidation reactions, comprises a tube made of materials capable of withstanding at least the temperatures generated by the exothermic CPOX reaction set out in Reaction 3 (in the case of methane as the feed hydrocarbon). Reactor 210 includes feed injection openings 212 and 214, a gas distributor 218, a mixing zone 219, a reaction zone 220 and, optionally, a heating or cooling zone 230.

[0043] Between injection openings 212 and 214 and mixing zone 219, manifolds 228, 238 receive the reactant gases and apportion each feed stream among a set of flow channel inlets into gas distributor 218. Gas from feed 212 passes through manifold 228 and is distributed generally in the manner indicated by lines 226. Similarly, gas from feed 214 passes through manifold 238 and is distributed generally in the manner indicated by lines 236. A schematic illustration of distributor 218 showing openings for channels corresponding to lines 226 is shown in Figure 5. It will be understood that the distributor configuration shown in Figure 1 could likewise be used in the system of Figure 4, with a corresponding configuration of feed lines and manifolds, or any other desired configuration of the distributor could be used.

[0044] Inside gas distributor 218 the gases can be redistributed, combined and/or mixed as desired, depending on the configuration of the channels. Reaction zone 220 preferably includes at least one thermal radiation shield or barrier 222 positioned immediately upstream of a catalyst or catalytic device 224 in a fixed-bed configuration. Radiation barrier 222 is preferably a porous ceramic or refractory material that is suited to withstand the reactor operating temperatures and provide sufficient thermal insulation to the unreacted gases in the mixing zone 219. It is preferred that there be a minimum of void or dead spaces in the areas of the reactor that are occupied by the mixed reactant gas in order to minimize the opportunity for gas stagnation and undesirable combustion reactions to occur before the reactant gas stream comes into contact with hot catalyst. Thus, if a chamber 240 is provided between distributor 218 and catalyst 224, its volume is preferably minimized. A second barrier may be positioned on the downstream side of the catalyst to retain the catalyst bed and to thermally insulate the reacted gases entering cooling zone 230. Such refractory materials are well known in the art. In commercial scale operations the reactor may be constructed of, or lined with, any suitable refractory material that is capable of withstanding the temperatures generated by the exothermic CPOX reaction, or at least 1,600 °C, preferably up to about 2,000 °C.

[0045] The catalyst 224 is positioned in reaction zone 220 in the flow path of the feed gas mixture. The catalyst 224 is preferably in the form of one or more porous monoliths or a bed of discrete or divided units or structures that is held between two porous refractory disks (i.e., irradiation barriers 222). Downstream of reaction zone 220 is an optional device 230 for heating or cooling the

gases, such as are known in the art.

[0046] In operation, a stream of light hydrocarbon, such as methane, or other feed gas is fed into feed injection opening 212. An oxygen-containing gas, such as air or oxygen is fed into a second injection opening 214, which is preferably positioned close to catalyst 224. It should be understood that the feed injection openings in the reactor, the manifold(s) and the micro-channel gas distributor 218 can be configured differently from the configuration shown in Figure 4 without affecting the principles or operation of the process. For example, as discussed above and illustrated in Figure 2, the flow channels in gas distributor 18 could be configured such that the oxygen is kept separate from the methane and is not mixed with the light hydrocarbon until it exits the gas distributor. In this embodiment, mixing of the gases occurs immediately before or during the contacting of the feed gas stream with a hot catalyst. Such configurations may help reduce the occurrence of unwanted side reactions that might otherwise rapidly occur during or after mixing of O₂ with the hydrocarbon components but prior to contacting the catalytic surfaces of the reaction zone.

[0047] Air or a mixture of air and oxygen can be substituted for the pure oxygen. However, since the presence of N₂ in the reactant gas mixture can be problematic (e.g., forming unwanted nitrogen-containing compounds), it is preferable in most cases to use pure oxygen instead of air. The hydrocarbon feedstock may be any gaseous hydrocarbon having a low boiling point, such as methane, natural gas, associated gas, or other sources of light hydrocarbons or alkanes having from 1 to 5 carbon atoms. The hydrocarbon feedstock may be a gas arising from naturally occurring reserves of methane. Preferably, the feed comprises at least about 80% by volume methane. The hydrocarbon feedstock may also include some steam and/or CO₂, as sometimes occurs in natural gas deposits.


[0048] The methane-containing feed and the O₂-containing feed are mixed in such amounts as to give a carbon (i.e., carbon in methane) to oxygen (i.e., molecular oxygen) molar ratio from about 1.5:1 to about 3.3:1, more preferably, from about 1.7:1 to about 2.1:1. The stoichiometric molar ratio of about 2:1 (CH₄:O₂) is especially desirable in obtaining the net partial oxidation reaction products ratio of 2:1 H₂:CO. As mentioned above, the hydrocarbon or reactant gas mixture is preferably preheated to about 30°C - 750°C before contacting the catalyst.

[0049] During mixing, the feed gases are shielded by radiation barrier 22 from radiant heat that is generated downstream in the process. It is preferred that the temperature on the upstream side of barrier 22 be in the range of about 30°C to about 500°C, preferably no more than about 750 °C, to help initiate the CPOX reaction. Excessive preheating the feed gases can cause unwanted homogeneous reactions to occur that reduce the selectivity of the process for the desired CO and H₂


products. In some instances, it may also be desirable to briefly supplement the hydrocarbon feed with propane or another pure hydrocarbon to facilitate rapid initiation of the CPOX reaction. After the gases pass barrier 22, they flow past catalytic device 24 and are simultaneously heated to 350°C - 2,000°C, preferably not exceeding 1,500°C, and more preferably staying in the range of about 400°C to about 1,200°C.

[0050] The preheated feed gases pass over the catalyst to the point at which the partial oxidation reaction initiates. An overall or net catalytic partial oxidation (CPOX) reaction ensues, and the reaction conditions are maintained to promote continuation of the process, which preferably is sustained autothermally. The term "autothermal" means that after initiation of the partial oxidation reaction, no additional or external heat must be supplied to the catalyst in order for the production of synthesis gas to continue. Under autothermal reaction conditions the hydrocarbon feed is partially oxidized and the heat produced by that exothermic reaction drives the continued net partial oxidation reaction. Consequently, under autothermal process conditions there is no external heat source required.

[0051] The gas flow rate is preferably maintained such that the contact time for each portion of the gas stream that contacts the catalyst is no more than about 200 milliseconds, more preferably under 50 milliseconds, and still more preferably 20 milliseconds or less. This degree of contact produces a favorable balance between competing reactions and produces sufficient heat to maintain the catalyst at the desired temperature. Exposure to the hot catalyst and oxygen partially oxidizes the light hydrocarbons in the feed according to the CPOX reaction (Reaction 4, in the case of methane):



[0052] It is preferred to keep the stoichiometric molar ratio of carbon oxygen at about 1.5:1 to 2.2:1, to favor the CPOX reaction. This is best accomplished by monitoring and adjusting during operation the composition, temperature, and flow rates of the feed gases, as further described below. For example, by establishing and maintaining process conditions favoring CPOX over the hydrocarbon combustion reaction (Reaction 5, in the case of methane)



the conversion of the carbon atoms contained in the hydrocarbon molecules to CO₂ is less likely to occur. In this way the CO₂ content of the product gases is minimized and the selectivity for CO and H₂ products is enhanced. In some situations it may be helpful to heat the catalyst using external means, at least at the start of the

process, so as to facilitate initiation of the exothermic reactions on the catalyst structure. Once the process is commenced, depending on the nature of the reaction, it may be run adiabatically or nearly adiabatically (i.e., without loss of heat), so as to reduce the formation of carbon (e.g., coke) on the surface of the catalyst. The catalyst is preferably heated sufficiently as a result of the exothermic chemical reactions occurring at its surface to perpetuate the CPOX reaction under favorable conditions of reactant gas molar ratios, flow rate and catalyst contact time. Heating by external means, or otherwise adjusting the temperature toward the higher end of the preferred operating range (i.e., 400°C - 1,500°C) can allow for increases in the rate at which feed gas can be passed through the catalyst structure while still obtaining desirable reaction products.

[0053] The hydrocarbon feedstock and the oxygen-containing gas may be passed over the catalyst at any of a variety of space velocities. Space velocities for the process, stated as gas hourly space velocity (GHSV), are in the range of about 20,000 to about 100,000,000 h⁻¹. Although for ease in comparison with prior art systems space velocities at standard conditions have been used to describe the preferred embodiment, it is well recognized in the art that residence time is the inverse of space velocity and that the disclosure of high space velocities corresponds to low residence times on the catalyst. "Space velocity," as that term is customarily used in chemical process descriptions, is typically expressed as volumetric gas hourly space velocity in units of h⁻¹. Under these operating conditions a flow rate of reactant gases is maintained sufficient to ensure a residence or dwell time of each portion of reactant gas mixture in contact with the catalyst of no more than 200 milliseconds, preferably less than 50 milliseconds, and still more preferably less than 20 milliseconds. A contact time of 10 milliseconds is highly preferred. The duration or degree of contact is preferably regulated so as to produce a favorable balance between competing reactions and to produce sufficient heat to maintain the catalyst at the desired temperature.

[0054] In order to obtain the desired high space velocities, the process is operated at atmospheric or superatmospheric pressures. The pressures may be in the range of about 100 kPa to about 32,000 kPa (about 1-320 atm), preferably from about 200 kPa to 10,000 kPa (about 2-100 atm).

[0055] The process is preferably operated at a temperature in the range of about 350°C to about 2,000°C, and preferably less than 1,500°C. More preferably, the temperature is maintained in the range 400°C - 1,200°C, as measured at the reactor outlet.

[0056] The product gas mixture emerging from the cooling zone 30 of reactor 10 is harvested and may be routed directly into any of a variety of applications, preferably at pressure. One such application for the CO and H₂ product stream is for producing higher molecular weight hydrocarbon compounds using Fischer-Tropsch

technology.

[0057] When employing either a monolith catalyst or a packed bed of divided catalyst, the surface area, depth of the catalyst bed, and gas flow rate (space velocity) are preferably chosen, or adjusted during operation, as applicable, so as to ensure the desired or optimal conversion efficiency and product selectivities. Under preferred CPOX promoting conditions with a methane feed the net partial oxidation of at least 90% of the CH₄ feed to CO and H₂ with a selectivity for CO and H₂ products of at least about 90% CO and 90% H₂ is achieved at 2 atmospheres pressure, or more, and at GHSV of 2,000,000 h⁻¹ or more.

[0058] The preferred embodiment has been disclosed in terms of its role in a catalytic partial oxidation process. It will be understood that the present invention has applicability in any catalytic reaction scheme, in which it is desired to mix or distribute reactants prior to contacting them with the catalyst, and particularly those reaction schemes in which it may be desired to heat or cool the reactant gases prior to contacting them with the catalyst. When one of the reactants is an oxygen-containing gas, exemplary reaction schemes include, in addition to partial oxidation of methane, oxidative dehydrogenation and catalytic partial oxidation of hydrogen sulfide.

[0059] While the preferred embodiments of the invention have been shown and described, modifications thereof can be made by one skilled in the art without departing from the teachings of the invention. The embodiments described herein are exemplary only, and are not intended to be limiting. Many variations and modifications of the invention disclosed herein are possible and are within the scope of the invention. Accordingly, the scope of protection is not limited by the description set out above, but is only limited by the claims which follow, that scope including all equivalents of the subject matter of the claims. The disclosures of all patents, patent applications and publications cited herein are incorporated by reference. The discussion of certain references in the Description of Related Art, above, is not an admission that they are prior art to the present invention, especially any references that may have a publication date after the priority date of this application.

Claims

1. A method for distributing at least two gases upstream onto a catalyst, comprising:
 - a) providing a gas distributor comprising a body having a plurality of channels therethrough and a plurality of outlets from said channels, said outlets configured so as to distribute gas onto the catalyst;
 - b) feeding a first gas into the gas distributor;
 - c) feeding a second gas into the gas distributor simultaneously with step b); and

- d) allowing the first and second gases to flow through the gas distributor, out through the outlets, and into contact with the catalyst.
2. The method of claim 1, wherein steps b) through d) are carried out such that gases flow across said catalyst at a gas hourly space velocity of at least 20,000 h⁻¹.
 3. The method of claim 1 or 2, wherein steps b) through d) are carried out such that gases flow across said catalyst at a gas hourly space velocity up to 100,000,000 h⁻¹.
 4. The method of claim 1, 2 or 3, wherein the gas distributor comprises a plurality of plates that have been etched and bonded together.
 5. The method of any preceding claim, wherein the gas distributor has at least 7 outlets.
 6. The method of any preceding claim, wherein the gas distributor has at least 100 outlets per square inch (1076 outlets per m²).
 7. The method of any preceding claim, wherein the gas distributor has at least 1,000 outlets per square inch (10764 outlets per m²).
 8. The method of any preceding claim, wherein the gas distributor has at least 2,000 outlets per square inch (21528 outlets per m²).
 9. The method of any preceding claim, wherein the first and second gases are combined within the gas distributor such that the gas exiting through the outlets comprises a mixture of the first and second gases.
 10. The method of any of claims 1 to 8, wherein the first and second gases are not combined within the gas distributor and the first and second gases are mixed between the outlets and the catalyst.
 11. The method of any preceding claim, wherein the pressure drop across the gas distributor is less than 30 psi (207 kPa).
 12. The method of any preceding claim, wherein each channel has an inlet opening and an outlet opening and ratio of the sum of the areas of the inlet openings to the sum of the areas of the outlet openings is between about 1:2 and 1:10.
 13. The method of claim 12, wherein ratio of the sum of the areas of the inlet openings to the sum of the areas of the outlet openings is between about 1:2 and 1:6.
 14. The method of any preceding claim, wherein each channel has at least one change in direction between its inlet and its outlet.
 15. The method of claim 1, wherein some channels share an outlet opening.
 16. The method of claim 1, wherein some channels share an inlet opening.
 17. A process for converting a hydrocarbon-containing feed gas to liquid hydrocarbon products comprising:
 - a) flowing the hydrocarbon-containing gas and an oxygen-containing gas through a micro-channel gas distributor having a plurality of gas outlets, so as to produce a reactant stream;
 - b) reacting the reactant stream in a syngas reactor under conditions effective to produce a syngas stream comprising hydrogen and carbon monoxide; and
 - c) reacting at least a portion of the syngas stream in a synthesis reactor under conditions effective to produce liquid hydrocarbon products.
 18. The process according to claim 17, wherein step b) includes keeping the temperature of the reactant gas stream at about 30°C - 750°C, contacting the reactant gas stream with a catalyst, keeping the temperature of the catalyst at about 600-2,000°C, and maintaining the reactant gas stream at a pressure of about 100-40,000 kPa (about 1 - 40 atmospheres) while contacting the catalyst.
 19. A reactor system for partially oxidizing a feed gas comprising:
 - a reactor containing a catalyst; and
 - a gas distributor comprising a body having a feed gas inlet, an oxygen inlet, a plurality of channels therethrough, and a plurality of outlets from said channels for distributing gas across said catalyst, said gas distributor including a manifold for receiving gases from the feed gas inlet and the oxygen inlet and distributing said gases into said channels in a desired manner;



wherein said outlets distribute a mixture of feed gas and oxygen onto the catalyst.
 20. The reactor system according to claim 19, wherein said feed gas comprises a light hydrocarbon.
 21. The reactor system according to claim 19, wherein


said feed gas comprises H₂S.


22. The reactor system of claim 19, 20 or 21, wherein
the gas distributor comprises a plurality of plates
that have been etched and diffusion bonded together. 5
23. The reactor system of any of claims 19 to 22, where-
in the gas distributor has at least 7 outlets. 10
24. The reactor system of any of claims 19 to 23, where-
in the gas distributor has at least 100 outlets per
square inch (1076 outlets per m²). 15
25. The reactor system of any of claims 19 to 24, where-
in the gas distributor has at least 2,000 outlets per
square inch (21528 outlets per m²). 20
26. The reactor system of any of claims 19 to 25, where-
in the gas distributor is configured such that the feed
gas and the oxygen-containing gas are combined
within the gas distributor such that the gas exiting
through the outlets comprises a mixture of the feed
gas and the oxygen-containing gas. 25
27. The reactor system of any of claims 19 to 25, where-
in the gas distributor is configured such that the feed
gas and the oxygen-containing gas are not com-
bined within the gas distributor and the feed gas and
the oxygen-containing gas are mixed between the 30
outlets and the catalyst.
28. A method of partially oxidizing a feed gas compris-
ing: 35
 - a) providing a reactor containing a catalyst;
 - b) providing a gas distributor comprising a body
having a plurality of channels therethrough, and
a plurality of outlets from said channels for dis-
tributing gas across the catalyst; 40
 - c) feeding the feed gas into the gas distributor;
 - d) feeding an oxygen-containing gas into the
gas distributor simultaneously with step c); and
 - e) allowing the feed gas and the oxygen-con-
taining gas to flow through the gas distributor
and out through the outlets into contact with the
catalyst; 45

whereby a product mixture containing CO and
H₂ is produced. 50

55

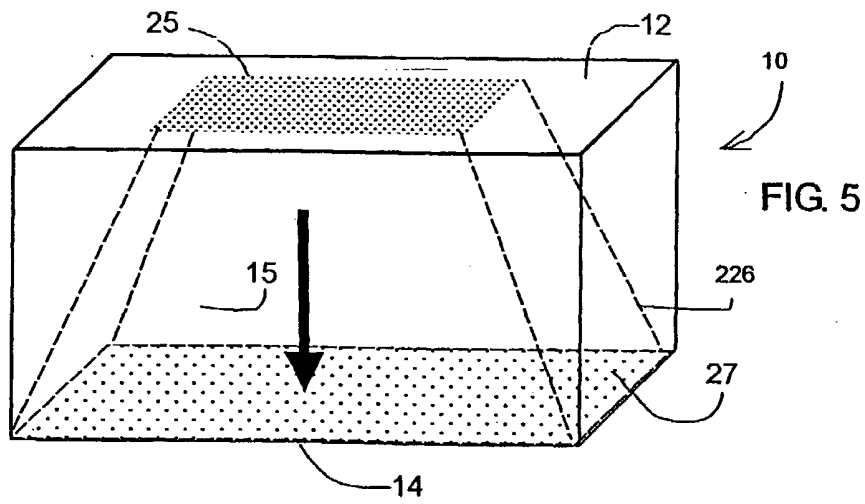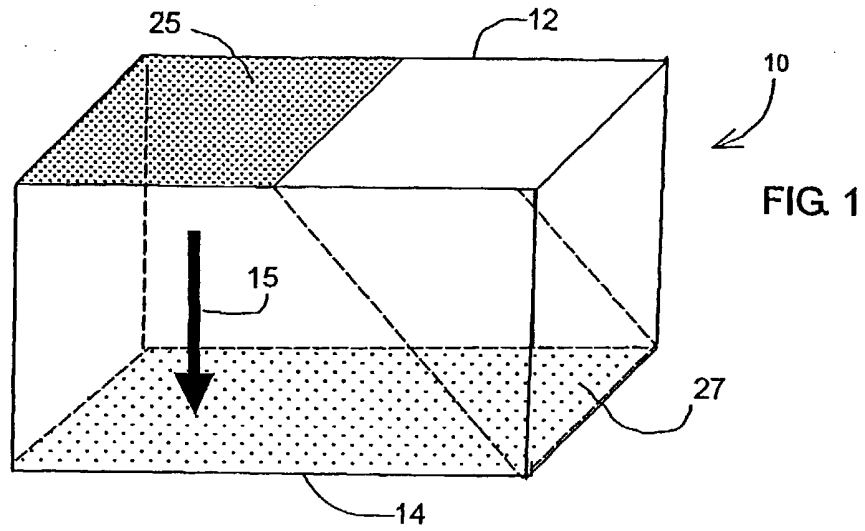

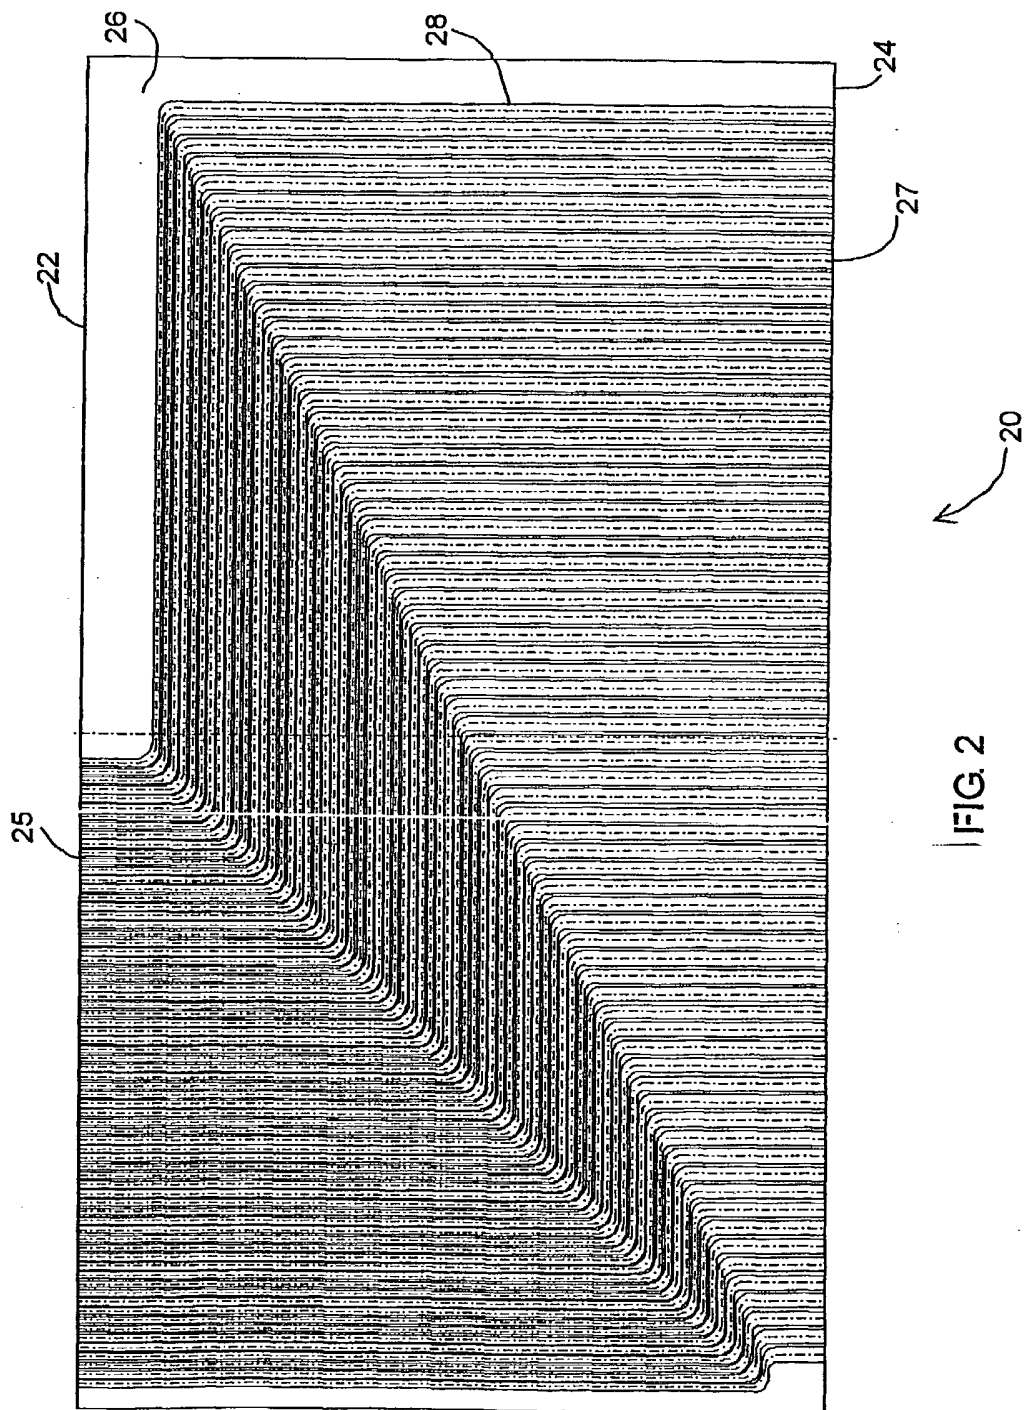

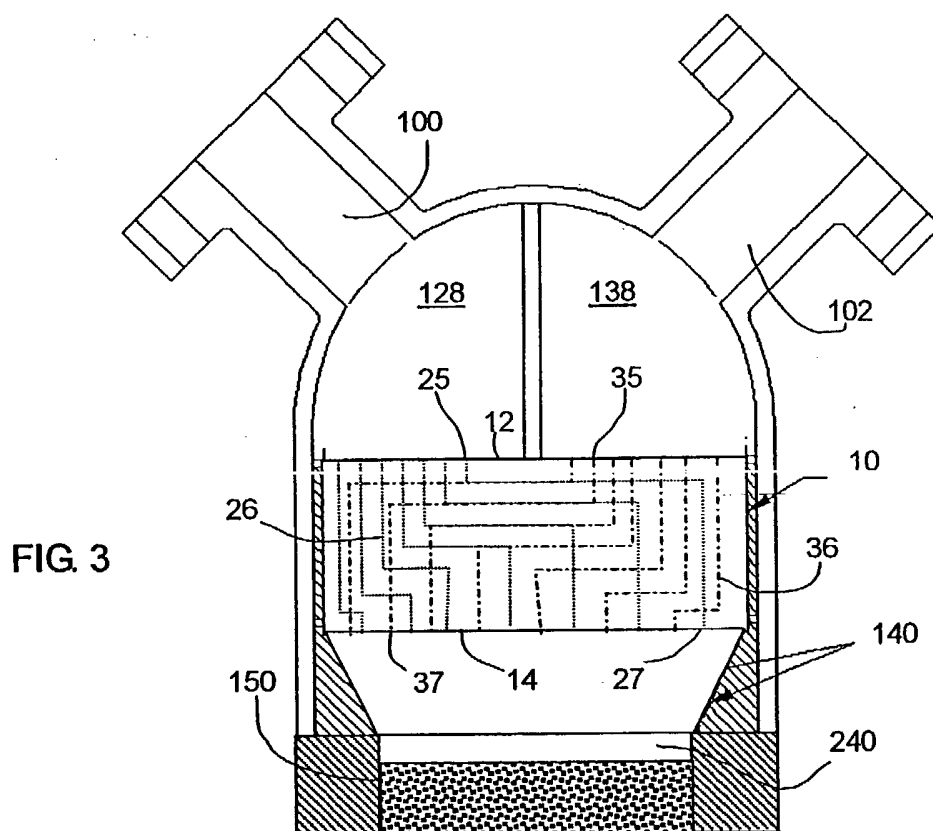

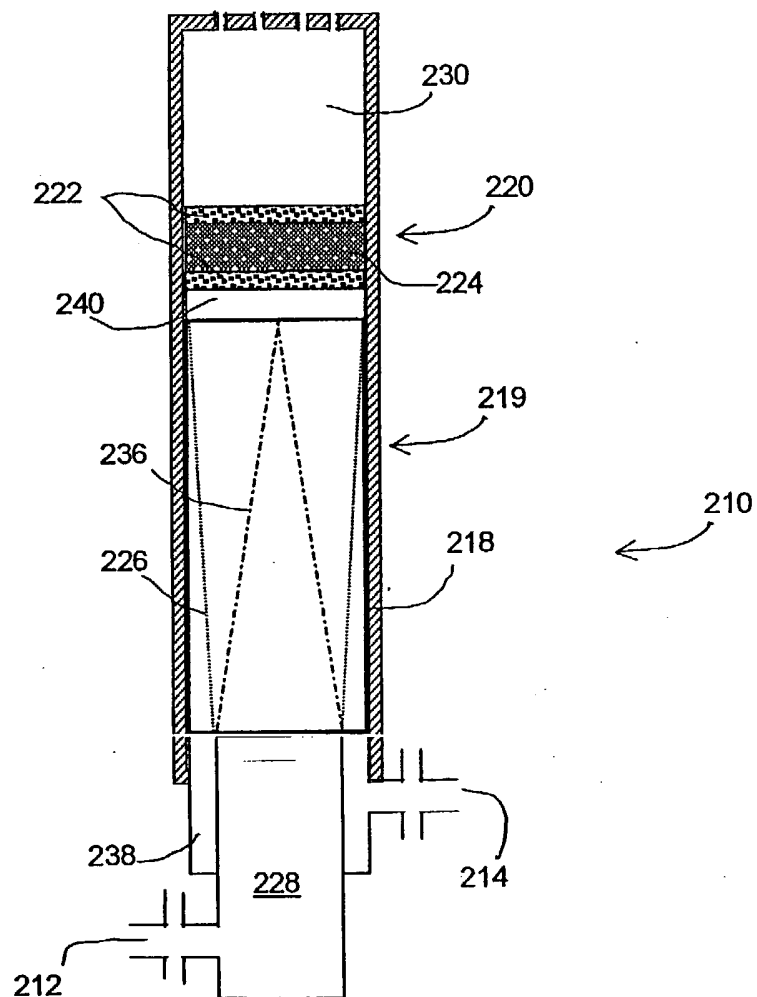


Fig. 4



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 25 4552

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 303 439 A (DAVY MCKEE CORP) 15 February 1989 (1989-02-15) * column 1, line 19 - line 31 * * column 3, line 62 - column 4, line 18 * * column 5, line 32 - column 6, line 9 * * column 7, line 65 - column 8, line 35; figures 1,2 *	1,5,9, 12,13, 17-20, 23,26,28	B01J8/02 C01B3/38
X	WO 01 76731 A (HYDROGEN BURNER TECHN INC) 18 October 2001 (2001-10-18) * page 15, line 24 - page 17, line 10; figure 8 *	1-3,5, 19,20, 23,28	
X	WO 02 06154 A (ZHDANOK SERGUEI ;AIR LIQUIDE (FR); GARY DANIEL (FR); LABRUNE PHILI) 24 January 2002 (2002-01-24) * page 4, line 18 - page 5, line 18; figure 2 *	1,5,10, 19,20, 23,27,28	
A	DE 37 31 988 A (STEINMUELLER GMBH L & C) 6 April 1989 (1989-04-06) * the whole document *	1-28	TECHNICAL FIELDS SEARCHED (Int.Cl.7) B01J C01B
A	US 3 996 025 A (GULDEN PETER) 7 December 1976 (1976-12-07) * abstract *	1-28	
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 13 November 2003	Examiner Cubas Alcaraz, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 02 (P/ALCO1)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 25 4552

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-11-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0303439	A	15-02-1989	US 4865820 A	12-09-1989
			AT 81490 T	15-10-1992
			AU 604956 B2	03-01-1991
			AU 2098888 A	16-02-1989
			BR 8804104 A	02-05-1989
			CA 1314129 C	09-03-1993
			CN 1033753 A ,B	12-07-1989
			DE 3875305 D1	19-11-1992
			DE 3875305 T2	25-02-1993
			DK 453288 A	15-02-1989
			EP 0303439 A2	15-02-1989
			ES 2035301 T3	16-04-1993
			GR 3006155 T3	21-06-1993
			IN 171676 A1	05-12-1992
			JP 1159037 A	22-06-1989
			JP 2752383 B2	18-05-1998
			KR 9609153 B1	16-07-1996
			MX 165662 B	27-11-1992
			NO 883606 A ,B,	15-02-1989
			NZ 225814 A	27-03-1990
			SU 1711659 A3	07-02-1992
			ZA 8805993 A	25-04-1990
WO 0176731	A	18-10-2001	AU 5133401 A	23-10-2001
			WO 0176731 A1	18-10-2001
			US 2001046462 A1	29-11-2001
WO 0206154	A	24-01-2002	FR 2811976 A1	25-01-2002
			AU 2292502 A	30-01-2002
			WO 0206154 A1	24-01-2002
DE 3731988	A	06-04-1989	DE 3731988 A1	06-04-1989
US 3996025	A	07-12-1976	DE 2439144 A1	26-02-1976
			CA 1066880 A1	27-11-1979
			FR 2282060 A1	12-03-1976
			GB 1491265 A	09-11-1977
			IT 1040486 B	20-12-1979
			JP 51044320 A	15-04-1976
			JP 58004204 B	25-01-1983

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82